



FEROFORM F57 Rollers

For Rolling Applications

Product Description

Tenmat Wear specially developed FEROFORM F57 rollers for hot and cold applications as a superior replacement for both steel and polyurethane rollers.

FEROFORM F57 rollers increase revenues for users as they are non-marking to protect metal quality. Materials costs are reduced as FEROFORM F57 rollers have an increased operating temperature, and last longer than rubber and PU. FEROFORM F57 rollers also avoid costly plant downtime by being maintenance-free.

The unique blend of finely-woven high-performance fibres builds an extremely tough, smooth, and resilient roller.

FEROFORM F57 rollers are successfully used by many leading manufacturers around the world.

FEROFORM F57 rollers avoid the frequent replacement of polyurethane and rubber rollers. Installing FEROFORM F57 rollers eliminates the time-consuming grinding and cleaning of production lines which is associated with metal rollers.

Product Advantages

- Protect the surface quality of products
- Reduce production costs
- Reduced downtime
- No marking of metal strip
- Longer life compared to rubber ad PU
- No pick up of contaminants
- High resistance to elevated temperature

Selected References

- Aleris Rolled Products
- Novelis
- Hydro Rolling Group
- Elval Hellenic
- South Korea's largest foil mill
- Constellium Group
- EU's leading annealing furnace OEM

Physical Properties

Property	Units	F57
Maximum Continuous Operating Strip Temperature	°C	500
Compressive Strength	MPa (Ambient)	380
Compressive Yield	% at 68.9 MPa	1.75
Impact Strength	kJ/m ²	63
Hardness	Shore D	90

Installation Examples

Mill Location	Industry	Area	Roller Position
Germany	Aluminium	Hot rolling	Hot table rollers
Switzerland	Aluminium	Hot rolling	Hot table rollers
USA	Aluminium	Cold rolling	Tensioning rollers
Greece	Aluminium	Hot rolling	Hot table rollers
Norway	Aluminium	Cold rolling	Deflector roller
Italy	Aluminium	Cold rolling	Deflector roller
Oman	Aluminium	Cold rolling	Deflector roller
Germany	Aluminium	Hot rolling	Sliding plates and bearings
China	Carbon Steel	Cold rolling	Entrance rollers annealing furnace
Russia	Aluminium	Cold rolling	Ironing roller on coiler unit
South Korea	Aluminium	Cold rolling	Ironing roller on coiler unit

Typical Successful Applications




Install into any roller position, which requires FEROFORM F57 roll surface to:

- (a) have anti-scratch properties
- (b) protect surface quality of product
- (c) withstand high contact temperatures
- (d) withstand high levels of abrasion / wear

This includes:

1. Hot rolling table rollers (non-ferrous only)
2. Deflector roller
3. Tensioning roller
4. Coil support rollers
5. Strip support rollers
6. Ironing roller
7. Nip roller
8. Furnace entry rollers
9. General transport rollers

● = F57 Application

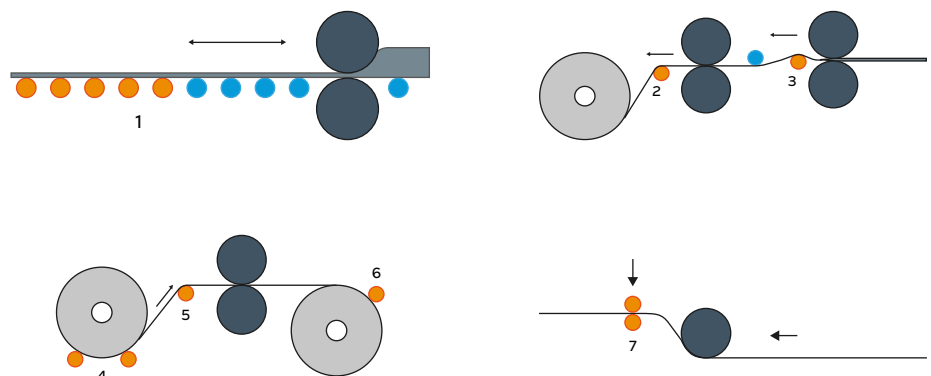

FEROFORM F57

Rollers

Tenmat Wear Ltd
Northbanks Industrial Park
Frank Perkins Way, Irlam
Manchester
M44 5EW United Kingdom

htsales@diamorph.com
UK: +44 161 4702689
USA: +1 302-6884990
Czech Republic: +420 378 010 910

tenmatwear.com



Advanced materials.
tenmatwear.com

Tenmat Wear warrants the materials it produces will conform to Tenmat Wear specifications and approved drawings where applicable. It is entirely the customer's responsibility to make the final product choice and satisfy themselves of the suitability of the product for the intended application, carrying out testing where required. For construction projects, all products which the customer is intending to use on a particular project must be approved in writing by the customer's building designer, system designer or design control professional, to ensure compliance with the latest regulations.

The information contained in Tenmat Wear data sheets is presented in good faith. The values are "typical only" and are based on test results generally in accordance with BS2782, ASTM, a variety of other main test bodies along with Tenmat Wear internal test methods. These values should not be relied upon for specification purposes or the primary selection of materials. As the data sheet values are typical only, Tenmat Wear does not warrant the conformity of its materials to these properties or the suitability of its materials for any particular purpose. It is the responsibility of the customer to do the necessary testing and satisfy themselves the product is suitable for the intended application.

